

# **SCHEDULED SERVICES - TURBO**

## **1996 Toyota Supra**

1993-96 MAINTENANCE  
Toyota Maintenance & Service Intervals (Turbo)  
Supra

### **\* PLEASE READ THIS FIRST \***

- NOTE: All SERVICE SCHEDULES are listed for normal service vehicles. If vehicle is operated under severe service conditions, see SEVERE SERVICE REQUIREMENTS (PERFORM W/SERVICE SCHEDULES) for items requiring additional maintenance.
- NOTE: This article contains scheduled maintenance service information. Fluid types and capacities listed with each service in this article are only those necessary to perform that scheduled service. For specifications pertaining to fluid capacities for the entire vehicle, fuse and circuit breaker identification, wheel and tire size, battery type, warranty information, or model identification refer to the MAINTENANCE INFORMATION article in this section.

### **CAUTIONS & WARNINGS**

#### **RADIATOR FAN & CAP**

To avoid injury, stay clear of the radiator fan when the ignition key is in the ON position. The fan is thermostatically controlled and may come on suddenly. DO NOT loosen or remove radiator cap when cooling system is hot.

#### **CATALYTIC CONVERTER**

To prevent catalytic converter overheating and possibly creating a fire hazard, do not allow engine to idle for more than 20 minutes, avoid spark jump test and prolonged engine compression measurement.

#### **SUPPLEMENTAL RESTRAINT SYSTEM (AIR BAG SYSTEM)**

- NOTE: For information on air bag DIAGNOSIS & TESTING or DISPOSAL PROCEDURES, see AIR BAGS article in the ACCESSORIES/SAFETY EQUIPMENT Section.

When servicing vehicles equipped with SRS, always allow at least 20 seconds after turning ignition switch to LOCK position and disconnecting the negative terminal cable before beginning work on the SRS. The system has a back-up power supply and may deploy air bag if these precautions are not followed.

### **SERVICE POINT LOCATIONS**

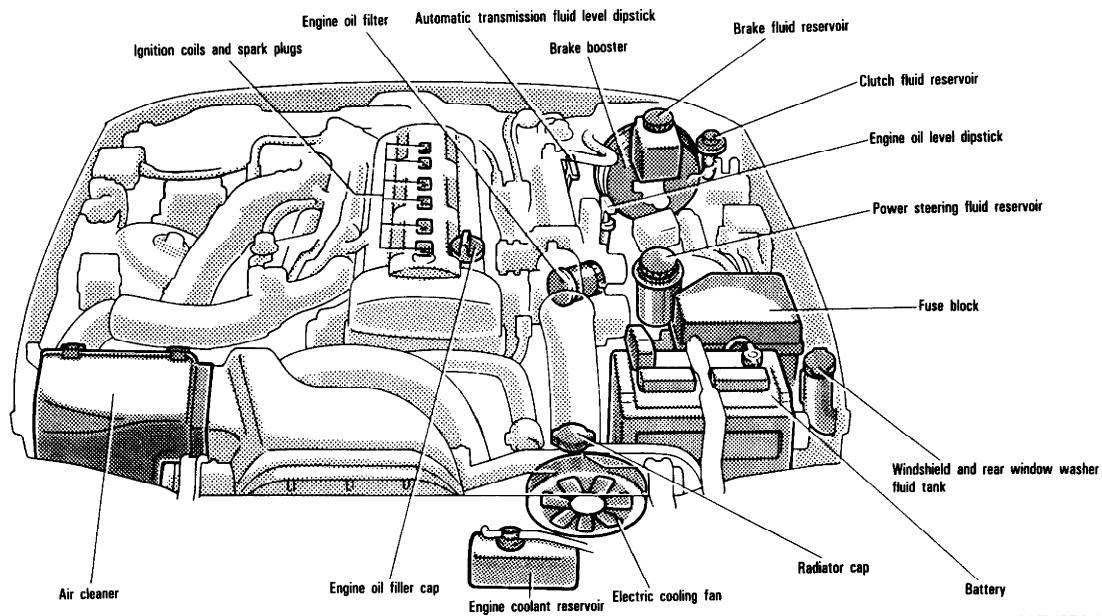


Fig. 1: Service Point Locations (2JZ-GTE Turbo Engine)  
Courtesy of Toyota Motor Sales, U.S.A., Inc.

93F45794

## CAMSHAFT TIMING BELT REPLACEMENT INFORMATION

**CAUTION:** Failure to replace a faulty camshaft timing belt may result in serious engine damage.

The condition of camshaft drive belts should always be checked on vehicles which have more than 50,000 miles. Although some manufacturers do not recommend belt replacement at a specified mileage, others require it at 60,000-100,000 miles. A camshaft drive belt failure may cause extensive damage to internal engine components on most engines, although some designs do not allow piston-to-valve contact. These designs are often called "Free Wheeling".

Many manufacturers changed their maintenance and warranty schedules in the mid-1980's to reflect timing belt inspection and/or replacement at 50,000-60,000 miles. Most service interval schedules in this manual reflect these changes.

Belts or components should be inspected and replaced if any of the following conditions exist:

- \* Cracks Or Tears In Belt Surface
- \* Missing, Damaged, Cracked Or Rounded Teeth
- \* Oil Contamination
- \* Damaged Or Faulty Tensioners
- \* Incorrect Tension Adjustment

Replace the timing belt every 72 months or 60,000 miles if the vehicle is operated under Severe Service conditions such as frequent idling or extensive long distance driving at low speeds.

## SEVERE & NORMAL SERVICE DEFINITIONS

Service is recommended at mileage intervals based on vehicle operation and engine type. Service schedules are based on the following primary operating conditions:

### Normal Service

- \* Driven More Than 10 Miles Daily
- \* No Operating Conditions From Severe Service Schedule

### Severe Service (Unique Driving Conditions)

- \* Towing A Trailer, Using A Camper Or Car Top Carrier
- \* Repeated Short Trips Less Than 5 Miles When Temperatures Are Below Freezing
- \* Extensive Idling Conditions (Taxi Or Delivery Type Service)
- \* Operating On Dusty, Rough, Muddy Or Salt Spread Roads

## SEVERE SERVICE REQUIREMENTS (PERFORM W/SERVICE SCHEDULES)

NOTE: The following services are to be performed on vehicles subjected to severe service. See SEVERE & NORMAL SERVICE DEFINITIONS. This service is to be performed in addition to the normal services listed in the NORMAL MAINTENANCE SERVICE SCHEDULES.

### SEVERE SERVICE CONDITIONS/ACTIONS TABLE

Condition	Action	Item	Perform Every (1)
Towing A Trailer, Using A Camper Or Car Top Carrier	Replace	Engine Oil	2,500 Miles or 3 Months
	Replace	Engine Oil Filter	5,000 Miles or 6 Months
	Replace	Transmission Fluid	15,000 Miles or 24 Months
	Replace	Differential Fluid	15,000 Miles or 24 Months
Repeated Short Trips Less Than 5 Miles When Temperatures Are Below Freezing	Replace	Engine Oil	2,500 Miles or 3 Months
	Replace	Engine Oil Filter	5,000 Miles or 6 Months
	Replace	Transmission Fluid	15,000 Miles or 24 Months
	Replace	Differential Fluid	15,000 Miles or 24 Months
Extensive Idling Conditions (Taxi Or Delivery Type Service)	Replace	Engine Oil	2,500 Miles or 3 Months
	Replace	Engine Oil Filter	5,000 Miles or 6 Months
	Replace	Transmission Fluid	15,000 Miles or 24 Months
	Replace	Differential Fluid	15,000 Miles or 24 Months
Operating On Dusty, Rough, Muddy Or Salt Spread Roads	Replace	Engine Oil	2,500 Miles or 3 Months
	Replace	Engine Oil Filter	5,000 Miles or 6 Months

	Replace	Transmission Fluid	15,000 Miles or 24 Months
	Replace	Differential Fluid	15,000 Miles or 24 Months
(1) - Perform these services at the mileage or number of months (since the last time), whichever comes first.			

## NORMAL MAINTENANCE SERVICE SCHEDULES (TURBO)

The following service schedules refer to vehicles driven under normal operating conditions. For vehicles driven under severe conditions, additional services may be necessary. See SEVERE SERVICE REQUIREMENTS (PERFORM W/SERVICE SCHEDULES) above in this article for additional service requirements.

### 5000 MILE (8000 KM) SERVICE

#### 5000 MILE (8000 KM) SERVICE

Service Or Inspect	
	Change Engine Oil
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C)	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C)	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2)	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

### 10,000 MILE (16,000 KM) SERVICE

#### 10,000 MILE (16,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil
	Change Oil Filter

Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 15,000 MILE (24,000 KM) SERVICE

### 15,000 MILE (24,000 KM) SERVICE

Service Or Inspect	
<input type="checkbox"/>	Verify Last Major Service Was Performed
<input type="checkbox"/>	Brake Lining & Drums
<input type="checkbox"/>	Brake Pads & Discs
<input type="checkbox"/>	Brake Line Pipes & Hoses
<input type="checkbox"/>	Steering Linkage
<input type="checkbox"/>	Ball Joints & Dust Covers
<input type="checkbox"/>	Transmission & Differential Fluid
<input type="checkbox"/>	Steering Gear Housing
<input type="checkbox"/>	Chassis Inspection
Replace	
<input type="checkbox"/>	Engine Oil
Lubrication Specifications	
Application	Specification
Automatic Transmission .....	ATF Type T-II
Differential (1)	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 90 API GL-5
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 80W Or 80W-90W API GL-5
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG

Maximum Temperature Less Than 0°F (-18°C)	SAE 5W-30 API/SG
Manual Transmission	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	
Fluid Capacities	
Application	(1) Quantity
Automatic Transmission	2.0 Qts. (1.9L)
Differential	
Rear	1.4 Qts. (1.3L)
Engine Oil (2)	5.3 Qts. (5.0L)
Manual Transmission	1.9 Qts. (1.8L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	
Service Labor Times	
Application	Hours
3.0L Turbo 6-Cylinder	1.5

## 20,000 MILE (32,000 KM) SERVICE

### 20,000 MILE (32,000 KM) SERVICE

Service Or Inspect	
<input type="checkbox"/>	Verify Last Major Service Was Performed
<input type="checkbox"/>	Change Engine Oil
<input type="checkbox"/>	Change Oil Filter
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 25,000 MILE (40,000 KM) SERVICE

## 25,000 MILE (40,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C)	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C)	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2)	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 30,000 MILE (48,000 KM) SERVICE

### 30,000 MILE (48,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Exhaust Pipes & Mountings
	Fuel Line & Connections
	Ball Joints & Dust Covers
	Steering Linkage
	Brake Linings & Drums
	Brake Pads & Discs
	Brake Lines & Hoses
	Transmission & Differential (Except LSD) Fluid
Replace	
	Engine Oil & Filter
	Air Filter
	Limited Slip Differential Fluid

Lubrication Specifications	
Application	Specification
Automatic Transmission .....	ATF Type T-II
Differential (1)	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 90 API GL-5
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 80W Or 80W-90W API GL-5
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Manual Transmission .....	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	
Fluid Capacities	
Application	(1) Quantity
Automatic Transmission .....	2.0 Qts. (1.9L)
Differential	
Rear .....	1.4 Qts. (1.3L)
Engine Oil (2) .....	5.3 Qts. (5.0L)
Manual Transmission .....	1.9 Qts. (1.8L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	
Service Labor Times	
Application	(1) Hours
3.0L Turbo 6-Cylinder .....	1.5
(1) - Add .2 hr. if equipped with Limited Slip Differential (LSD).	

## 35,000 MILE (56,000 KM) SERVICE

### 35,000 MILE (56,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG



Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

### 40,000 MILE (64,000 KM) SERVICE

40,000 MILE (64,000 KM) SERVICE

Service Or Inspect	
<input type="checkbox"/>	Verify Last Major Service Was Performed
<input type="checkbox"/>	Change Engine Oil
<input type="checkbox"/>	Change Oil Filter
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

### 45,000 MILE (72,000 KM) SERVICE

45,000 MILE (72,000 KM) SERVICE

Service Or Inspect	
<input type="checkbox"/>	Verify Last Major Service Was Performed
<input type="checkbox"/>	Brake Lining & Drums
<input type="checkbox"/>	Brake Pads & Discs
<input type="checkbox"/>	Brake Line Pipes & Hoses
<input type="checkbox"/>	Steering Linkage
<input type="checkbox"/>	Ball Joints & Dust Covers

	Transmission & Differential Fluid
	Steering Gear Housing
	Chassis Inspection
	Replace
	Engine Coolant
	Engine Oil
	Lubrication Specifications
Application	Specification
Automatic Transmission .....	ATF Type T-II
Differential (1)	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 90 API GL-5
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 80W Or 80W-90W API GL-5
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Manual Transmission .....	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	
	Fluid Capacities
Application	(1) Quantity
Automatic Transmission .....	2.0 Qts. (1.9L)
Cooling System .....	10.0 Qts. (9.5L)
Differential	
Rear .....	1.4 Qts. (1.3L)
Engine Oil (2) .....	5.3 Qts. (5.0L)
Manual Transmission .....	1.9 Qts. (1.8L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 50,000 MILE (80,000 KM) SERVICE

### 50,000 MILE (80,000 KM) SERVICE

	Service Or Inspect
	Verify Last Major Service Was Performed
	Change Engine Oil
	Change Oil Filter
	Lubrication Specifications

Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

### 55,000 MILE (88,000 KM) SERVICE

55,000 MILE (88,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

### 60,000 MILE (96,000 KM) SERVICE

60,000 MILE (96,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Valve Clearance
	Drive Belts

	Exhaust Pipes & Mountings
	Fuel Line & Connections
	Charcoal Canister
	Brake Lining & Drums
	Brake Pads & Discs
	Brake Line Pipes & Hoses
	Steering Linkage
	Ball Joints & Dust Covers
	Transmission & Differential (Except LSD) Fluid
	Steering Gear Housing
	Chassis Inspection
Replace	
	Engine Oil & Filter
	Engine Coolant
	Air Filter
	Fuel Tank Cap Gasket
	Spark Plugs
	Camshaft Timing Belt (Severe Service)
	Limited Slip Differential (LSD) Oil
Lubrication Specifications	
Application	Specification
Automatic Transmission	ATF Type T-II
Differential (1)	
Minimum Temperature	
Greater Than 0°F (-18°C)	SAE 90 API GL-5
Maximum Temperature	
Less Than 0°F (-18°C)	SAE 80W Or 80W-90W API GL-5
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C)	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C)	SAE 5W-30 API/SG
Manual Transmission	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	
Fluid Capacities	
Application	(1) Quantity

Automatic Transmission .....	2.0 Qts. (1.9L)
Cooling System .....	10.0 Qts. (9.5L)
Differential	
Rear .....	1.4 Qts. (1.3L)
Engine Oil (2) .....	5.3 Qts. (5.0L)
Manual Transmission .....	1.9 Qts. (1.8L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	
Service Labor Times	
Application	(1) Hours
3.0L Turbo 6-Cylinder .....	(2) 9.6
(1) - Add .2 hr. if equipped with Limited Slip Differential (LSD).	
(2) - Add 2.3 hrs. to replace camshaft timing belt.	

## 65,000 MILE (104,000 KM) SERVICE

### 65,000 MILE (104,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 70,000 MILE (112,000 KM) SERVICE

### 70,000 MILE (112,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil

Change Oil Filter	
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 75,000 MILE (120,000 KM) SERVICE

### 75,000 MILE (120,000 KM) SERVICE

Service Or Inspect	
Verify Last Major Service Was Performed	
Brake Lining & Drums	
Brake Pads & Discs	
Brake Line Pipes & Hoses	
Steering Linkage	
Ball Joints & Dust Covers	
Transmission & Differential Fluid	
Steering Gear Housing	
Chassis Inspection	
Replace	
Engine Oil	
Lubrication Specifications	
Application	Specification
Automatic Transmission .....	ATF Type T-II
Differential (1)	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 90 API GL-5
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 80W Or 80W-90W API GL-5
Engine Oil	

Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Manual Transmission .....	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	
Fluid Capacities	
Application	(1) Quantity
Automatic Transmission .....	2.0 Qts. (1.9L)
Differential Rear .....	1.4 Qts. (1.3L)
Engine Oil (2) .....	5.3 Qts. (5.0L)
Manual Transmission .....	1.9 Qts. (1.8L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	
Service Labor Times	
Application	Hours
3.0L Turbo 6-Cylinder .....	1.5

## 80,000 MILE (128,000 KM) SERVICE

### 80,000 MILE (128,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil
	Change Oil Filter
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 85,000 MILE (136,000 KM) SERVICE

85,000 MILE (136,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C)	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C)	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2)	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 90,000 MILE (144,000 KM) SERVICE

90,000 MILE (144,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Exhaust Pipes & Mountings
	Fuel Line & Connections
	Ball Joints & Dust Covers
	Steering Linkage
	Brake Linings & Drums
	Brake Pads & Discs
	Brake Lines & Hoses
	Transmission & Differential (Except LSD) Fluid
Replace	
	Engine Oil & Filter
	Air Filter



Limited Slip Differential Fluid	
Lubrication Specifications	
Application	Specification
Automatic Transmission .....	ATF Type T-II
Differential (1)	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 90 API GL-5
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 80W Or 80W-90W API GL-5
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Manual Transmission .....	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	
Fluid Capacities	
Application	(1) Quantity
Automatic Transmission .....	2.0 Qts. (1.9L)
Differential	
Rear .....	1.4 Qts. (1.3L)
Engine Oil (2) .....	5.3 Qts. (5.0L)
Manual Transmission .....	1.9 Qts. (1.8L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	
Service Labor Times	
Application	(1) Hours
3.0L Turbo 6-Cylinder .....	1.5
(1) - Add .2 hr. if equipped with Limited Slip Differential (LSD).	

## 95,000 MILE (152,000 KM) SERVICE

### 95,000 MILE (152,000 KM) SERVICE

Service Or Inspect	
Verify Last Major Service Was Performed	
Change Engine Oil	
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG

Maximum Temperature Less Than 0°F (-18°C) .....		SAE 5W-30 API/SG
Fluid Capacities		
Application		(1) Quantity
Engine Oil (2) .....		5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.		
(2) - Includes filter change.		

### 100,000 MILE (160,000 KM) SERVICE

100,000 MILE (160,000 KM) SERVICE

Service Or Inspect	
	Verify Last Major Service Was Performed
	Change Engine Oil
	Change Oil Filter
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C)	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C)	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2)	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

### 105,000 MILE (168,000 KM) SERVICE

105,000 MILE (168,000 KM) SERVICE

Service Or Inspect		
	Verify Last Major Service Was Performed	
	Brake Lining & Drums	
	Brake Pads & Discs	
	Brake Line Pipes & Hoses	
	Steering Linkage	

	Ball Joints & Dust Covers
	Transmission & Differential Fluid
	Steering Gear Housing
	Chassis Inspection
	Replace
	Engine Coolant
	Engine Oil
Lubrication Specifications	
Application	Specification
Automatic Transmission .....	ATF Type T-II
Differential (1)	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 90 API GL-5
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 80W Or 80W-90W API GL-5
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Manual Transmission .....	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	
Fluid Capacities	
Application	(1) Quantity
Automatic Transmission .....	2.0 Qts. (1.9L)
Cooling System .....	10.0 Qts. (9.5L)
Differential	
Rear .....	1.4 Qts. (1.3L)
Engine Oil (2) .....	5.3 Qts. (5.0L)
Manual Transmission .....	1.9 Qts. (1.8L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

## 110,000 MILE (176,000 KM) SERVICE

110,000 MILE (176,000 KM) SERVICE

	Service Or Inspect
	Verify Last Major Service Was Performed
	Change Engine Oil
	Change Oil Filter

Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

### 115,000 MILE (184,000 KM) SERVICE

115,000 MILE (184,000 KM) SERVICE

Service Or Inspect	
<input type="checkbox"/>	Verify Last Major Service Was Performed
<input type="checkbox"/>	Change Engine Oil
Lubrication Specifications	
Application	Specification
Engine Oil	
Minimum Temperature Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Fluid Capacities	
Application	(1) Quantity
Engine Oil (2) .....	5.3 Qts. (5.0L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	

### 120,000 MILE (192,000 KM) SERVICE

120,000 MILE (192,000 KM) SERVICE

Service Or Inspect	
<input type="checkbox"/>	Verify Last Major Service Was Performed
<input type="checkbox"/>	Valve Clearance

	Drive Belts
	Exhaust Pipes & Mountings
	Fuel Line & Connections
	Charcoal Canister
	Brake Lining & Drums
	Brake Pads & Discs
	Brake Line Pipes & Hoses
	Steering Linkage
	Ball Joints & Dust Covers
	Transmission & Differential (Except LSD) Fluid
	Steering Gear Housing
	Chassis Inspection
Replace	
	Engine Oil & Filter
	Engine Coolant
	Air Filter
	Fuel Tank Cap Gasket
	Spark Plugs
	Camshaft Timing Belt (Severe Service)
	Limited Slip Differential (LSD) Oil
Lubrication Specifications	
Application	Specification
Automatic Transmission .....	ATF Type T-II
Differential (1)	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 90 API GL-5
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 80W Or 80W-90W API GL-5
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Manual Transmission .....	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	
Fluid Capacities	

Application	(1) Quantity
Automatic Transmission .....	2.0 Qts. (1.9L)
Cooling System .....	10.0 Qts. (9.5L)
Differential	
Rear .....	1.4 Qts. (1.3L)
Engine Oil (2) .....	5.3 Qts. (5.0L)
Manual Transmission .....	1.9 Qts. (1.8L)
(1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.	
(2) - Includes filter change.	
Service Labor Times	
Application	(1) Hours
3.0L Turbo 6-Cylinder .....	(2) 9.6
(1) - Add .2 hr. if equipped with Limited Slip Differential (LSD).	
(2) - Add 2.3 hrs. to replace camshaft timing belt.	

## LUBRICATION SPECIFICATIONS

LUBRICATION SPECIFICATIONS TABLE

Application	Fluid Specifications
Brake & Clutch Fluid .....	SAE J1703 Or DOT 3 Brake Fluid
Differential (1)	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 90 API GL-5
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 80W Or 80W-90W API GL-5
Engine Oil	
Minimum Temperature	
Greater Than 0°F (-18°C) .....	SAE 10W-30 API/SG
Maximum Temperature	
Less Than 0°F (-18°C) .....	SAE 5W-30 API/SG
Power Steering Fluid .....	Dexron-II ATF
Transmission	
Automatic Transmission .....	ATF Type T-II
Manual Transmission .....	ATF Dexron
(1) - For Limited Slip Differential (LSD), use only hypoid gear oil specifically recommended for LSD.	

## FLUID CAPACITIES

FLUID CAPACITIES TABLE (1)

Application	Quantity
A/C System R-134a Refrigerant (2) .....	23-26.5 Ozs.
Cooling System .....	10.0 Qts. (9.5L)
Differential .....	1.4 Qts. (1.3L)
Engine Oil (3) .....	5.3 Qts. (5.0L)
Fuel Tank .....	18.5 Gals. (70L)
Automatic Transmission .....	2.0 Qts. (1.9L)
Manual Transmission .....	1.9 Qts. (1.8L)

- (1) - Capacities are recommended or calculated levels. Always use dipstick (if available) to measure level.
  - (2) - Use of R-12 in a R134a system will result in SEVERE DAMAGE.
  - (3) - Includes filter change.
-